

Superlite[®]

SUPERLITE ASBESTOS FREE



GP-150

Basis

Gasket material based on organic fibre with NBR binder.

Application

General purpose grade suitable for low pressure steam, water, oils, fuels and inert gases for low stress conditions.

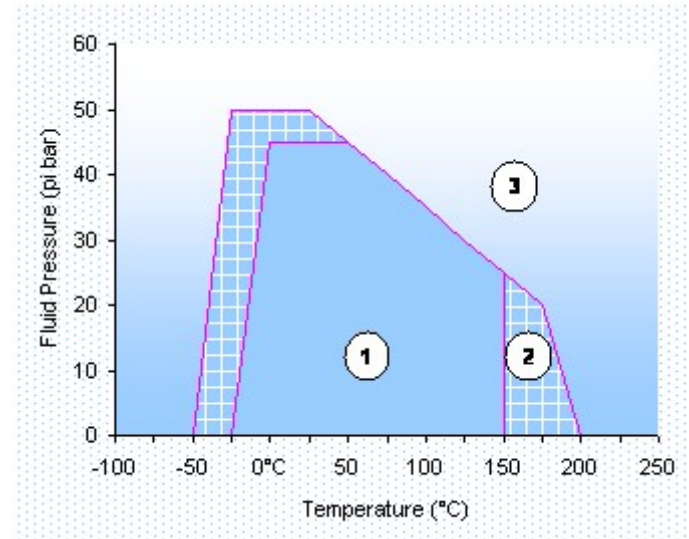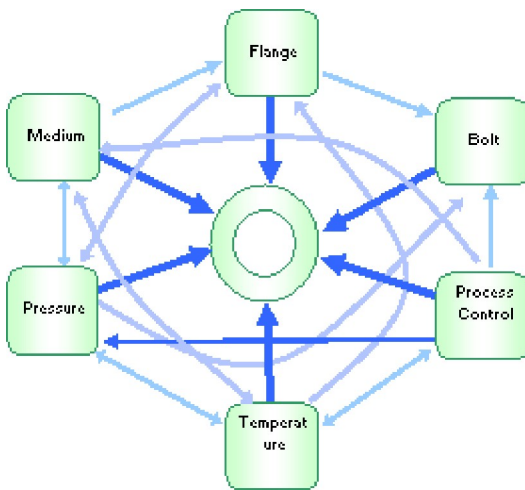

Factors affecting on the gasket

The suitability of a gasket material for an application is dependent upon a multiplicity of factors as shown in the above digram. Max. temperature and pressure values can not define the suitability for application. It is always advisable to consider these factors when selecting a material for a given application.

Areas of application

- 1) This area refer , the gasket material is normally suitable subject to chemical compatibility.
- 2) This area refer, the gasket material may be suitable but a technical support is recommended.
- 3) This area refer, do not install the gasket without technical evaluation.

Dimensions of the standard sheets

1500 mm X 1500 mm, 1500 mm X 2250 mm, 1500 mm x 4500 mm

Specifications : ASTM F 104 F 712132E43 A9 B6 M4

Technical data

All data are typical values and refer to sheet thickness of 1.5 mm

	Specification	
Max. Peak Temperature		200°C
Max. Operating Temperature		150°C
Max. Operating Pressure		50bar
Density	ASTM F 1315	1.8g/cm ³
Compressibility	ASTM F 36 J	8%
Recovery	ASTM F 36 J	50%
Tensile Strength	ASTM F 152	7N/mm ²

Creep Relaxation	ASTM F 38 B	40%
Gas Sealability	ASTM F 37 B	< 1.0ml/min.
Thickness Increase	ASTM F 146	
ASTM oil no.3 (5h, 150°C)		10%
ASTM Fuel B (5h, 23°C)		10%
Water (5h, 100°C)		6%
Weight Increase	ASTM F 146	
ASTM oil no.3 (5h, 150°C)		15%
ASTM Fuel B (5h, 23°C)		15%
Water (5h, 100°C)		5%

All information and recommendations given in this brochure are correct to the best of our knowledge. However, in view of the wide variety of possible installation and operating conditions one cannot draw the final conclusion in all application cases regarding the behaviour in a gasket joint. Therefore, information can only serve as a guideline.